

FEATURES


- 1). Improved glass passivation for high reliability and exceptional stability at high temperature
- 2). High di/dt and dv/dt capabilities
- 3). Standard package
- 4). Low thermal resistance
- 5). Metric threads version available
- 6). Types up to 1200V V_{DRM}/V_{RRM}

TYPICAL APPLICATIONS

- 1). Medium power switching
- 2). Phase control applications
- 3). Can be supplied to meet stringent military, aerospace and other high-reliability requirements

MAJOR RATINGS AND CHARACTERISTICS

Parameters		10RIA	Unit
$I_{F(AV)}$		10	A
	@ T_C	85	°C
$I_{F(RMS)}$		25	A
	@ 50Hz	225	A
I_{FSM}	@ 60Hz	240	A
	@ 50Hz	255	A ² s
I^2t	@ 60Hz	233	A ² s
		100 to 1200	V
V_{DRM}/V_{RRM}			
T_q	typical	110	μs
T_J		- 65 to 125	°C

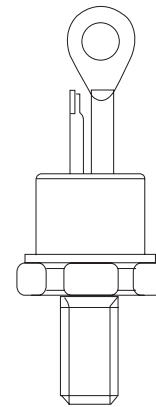

ELECTRICAL SPECIFICATIONS

1). Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM} , maximum repetitive peak reverse voltage *(1)	V_{RSM} , maximum non-repetitive peak reverse voltage *(2)	I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max
		V	V	mA
10RIA	10	100	150	20
	20	200	300	
	40	400	500	
	60	600	700	
	80	800	900	
	100	1000	1100	
	120	1200	1300	

*(1) Units may be broken over non-repetitively in the off-state direction without damage, if di/dt does not exceed 20A/μs

*(2) For voltage pulses with $t_p \leq 5ms$

2). Forward Conduction

Parameters		10RIA	Unit	Conditions		
$I_{T(AV)}$	Max. average forward current	10	A	180° conduction, half sine wave		
	@ Case temperature	85	°C			
$I_{T(RMS)}$	Max. RMS forward current	25	A			
I_{TSM}	Max. peak, one-cycle forward, non-repetitive surge current	225	A	t = 10ms	No voltage	Sinusoidal half wave, Initial $T_J = T_J \text{ max.}$
		240		t = 8.3ms	reapplied	
		190		t = 10ms	100% V_{RRM}	
		200		t = 8.3ms	reapplied	
I^2t	Maximum I^2t for fusing	255	A^2s	t = 10ms	No voltage	Initial $T_J = T_J \text{ max.}$
		233		t = 8.3ms	reapplied	
		180		t = 10ms	100% V_{RRM}	
		165		t = 8.3ms	reapplied	
$I^2\sqrt{t}$	Maximum $I^2\sqrt{t}$ for fusing	2550	$A^2\sqrt{s}$	t = 0.1 to 10ms, no voltage reapplied		
$V_{T(TO)1}$	Low level value of threshold voltage	1.10	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J \text{ max.}$		
$V_{T(TO)2}$	High level value of threshold voltage	1.39		$(I > \pi \times I_{F(AV)})$, $T_J = T_J \text{ max.}$		
r_{T1}	Low level value of forward slope resistance	24.3	$m\Omega$	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J \text{ max.}$		
r_{T2}	High level value of forward slope resistance	16.7		$(I > \pi \times I_{F(AV)})$, $T_J = T_J \text{ max.}$		
V_{TM}	Max. forward voltage drop	1.75	V	$I_{pk} = 32A$, $T_J = 25^\circ C$, $t_p = 10ms$ sine pulse		
I_H	Maximum holding current	130	mA	$T_J = 25^\circ C$, anode supply 12V resistive load		
I_L	Typical latching current	200				
di/dt	Max. rate of rise of turned-on current		$A/\mu s$	$T_J = T_J \text{ max.}$, $V_{DM} = \text{rated } V_{DRM}$ Gate pulse = 20V, 15Ω , $t_p = 6 \mu s$, $t_r = 0.1 \mu s \text{ max.}$ $I_{TM} = (2x \text{ rated } di/dt) A$		
	$V_{DRM} \leq 600V$	200				
	$V_{DRM} \leq 800V$	180				
	$V_{DRM} \leq 1000V$	160				
	$V_{DRM} \leq 1600V$	150				
t_{gt}	Typical turn-on time	0.9		$T_J = 25^\circ C$, at = rated V_{DRM}/V_{RRM} , $T_J = 125^\circ C$		
t_{rr}	Typical reverse recovery time	4		$T_J = T_J \text{ max.}$, $I_{TM} = I_{T(AV)}$, $t_p > 200 \mu s$, $di/dt = -10A/\mu s$		
t_q	Typical turn-off time	110	μs	$T_J = T_J \text{ max.}$, $I_{TM} = I_{T(AV)}$, $t_p > 200 \mu s$, $V_R = 100V$, $di/dt = -10A/\mu s$, $dv/dt = 20V/\mu s$ linear to 67% V_{DRM} , gate bias 0V-100W		
dv/dt	Max. critical rate of rise of	100		$T_J = T_J \text{ max.}$ linear to 100% rated V_{DRM}		
	off-state voltage	300 (*)		$T_J = T_J \text{ max.}$ linear to 67% rated V_{DRM}		

(*) $t_q = 10 \mu s$ sup to 600V, $t_q = 30 \mu s$ up to 1600V available on special request.

(**) Available with: $dv/dt = 1000V/\mu s$, to complete code add S90 i.e. 16RIA120S90.

3). Triggering

Parameters		10RIA		Unit	Conditions	
P_{GM}	Maximum peak gate power	8.0		W	$T_J = T_J \text{ max.}$	
$P_{G(AV)}$	Maximum average gate power	2.0				
I_{GM}	Max. peak positive gate current	1.5		A	$T_J = T_J \text{ max.}$	
$-V_{GM}$	Maximum peak negative gate voltage	10		V	$T_J = T_J \text{ max.}$	
I_{GT}	DC gate current required to trigger	90		mA	$T_J = -65^\circ\text{C}$ Max. required gate trigger current/ voltage are the lowest value which will trigger all units 6V anode-to- cathode applied $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	
		60				
		35				
V_{GT}	DC gate voltage required to trigger	3.0		V	$T_J = -65^\circ\text{C}$ $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	
		2.0				
		1.0				
I_{GD}	DC gate current not to trigger	2.0		mA	$T_J = T_J \text{ max.}, V_{DRM} = \text{rated value}$	
V_{GD}	DC gate voltage not to trigger	0.2		V	$T_J = T_J \text{ max.}$ Max. gate current/ voltage not to trigger is the max. value which. will not trigger any unit with rated V_{DRM} anode-to-cathode applied $V_{DRM} = \text{rated value}$	
T_J	Max. operating temperature range	- 65 to 125		$^\circ\text{C}$		
T_{stg}	Max. storage temperature range	- 65 to 125		$^\circ\text{C}$		
R_{thJC}	Max. thermal resistance, junction to case	1.85		K/W	DC operation	
R_{thCS}	Max. thermal resistance, case to heatsink	0.35		K/W	Mounting surface, smooth, flat and greased	
T	Mounting torque		to nut	to device	Lubricated threads (Non-lubricated threads)	
			20(27.5)	25		lbf-in
			0.23(0.32)	0.29		kgf.m
			2.3(3.1)	2.8		Nm
wt	Approximate weight	14 (0.49)		g (oz)	See Outline Table	
	Case style	TO-48				

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.44	0.32	K/W	$T_J = T_J \text{ max.}$
120°	0.53	0.56		
90°	0.68	0.75		
60°	1.01	1.05		
30°	1.71	1.73		

PERFORMANCE CURVES FIGURE

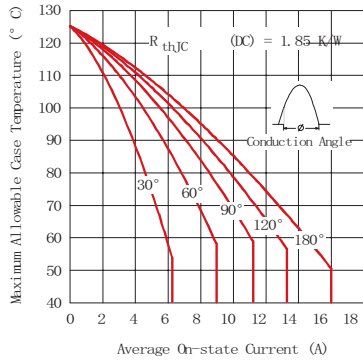


Fig. 1 - Current Ratings Characteristic

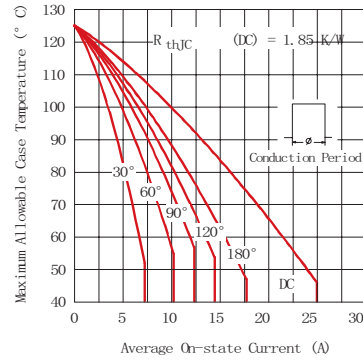


Fig. 2 - Current Ratings Characteristic

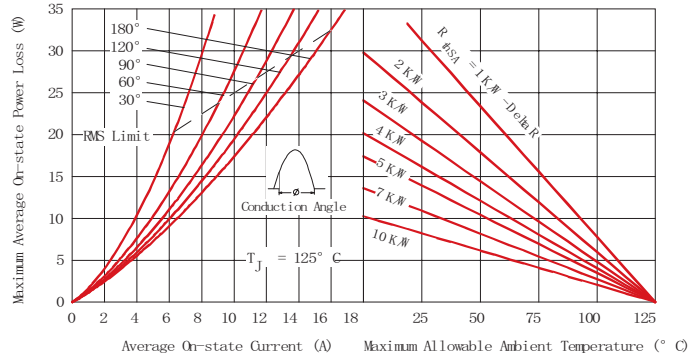


Fig. 3 - On-state Power Loss Characteristics

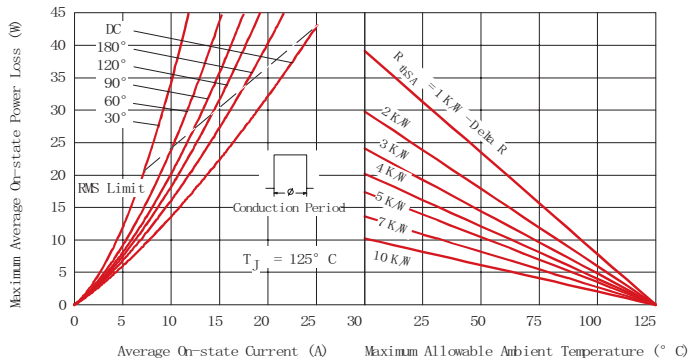


Fig. 4 - On-state Power Loss Characteristics

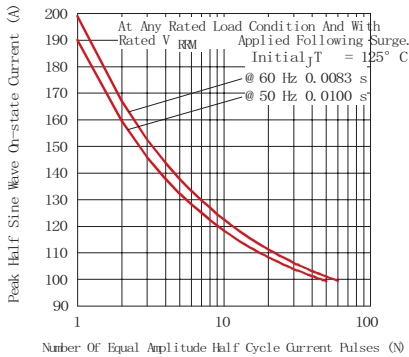


Fig. 5 - Maximum Non-Repetitive Surge Current

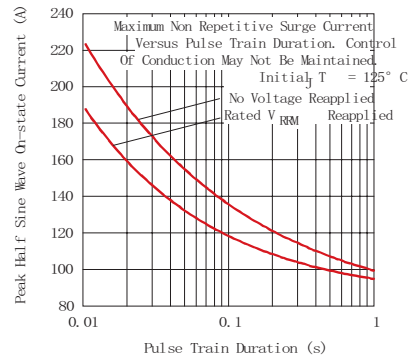


Fig. 6 - Maximum Non-Repetitive Surge Current

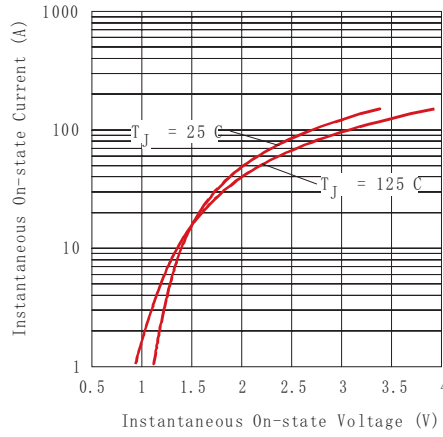


Fig. 7 - Forward Voltage Drop Characteristics

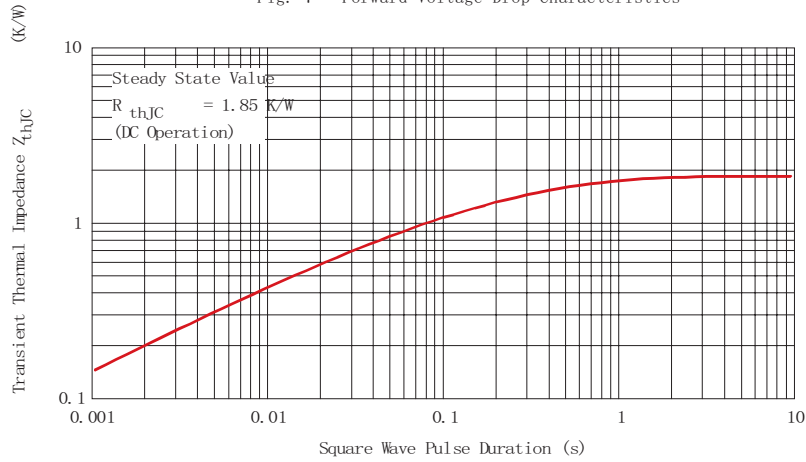


Fig. 8 - Thermal Impedance Z_{thJC} Characteristics



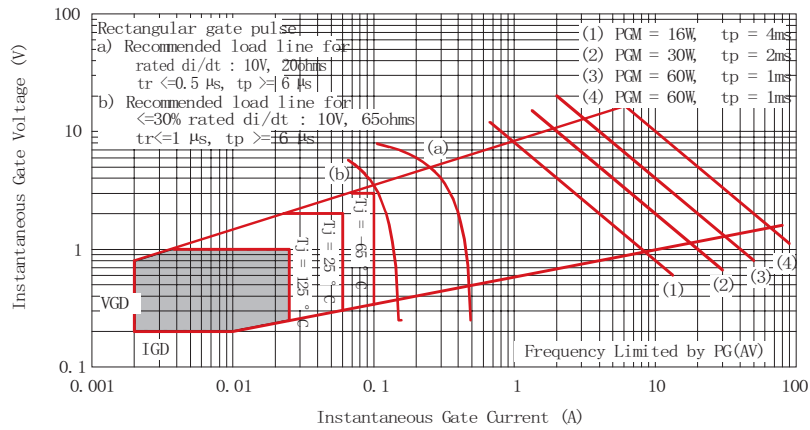


Fig. 9 - Gate Characteristics

OUTLINE

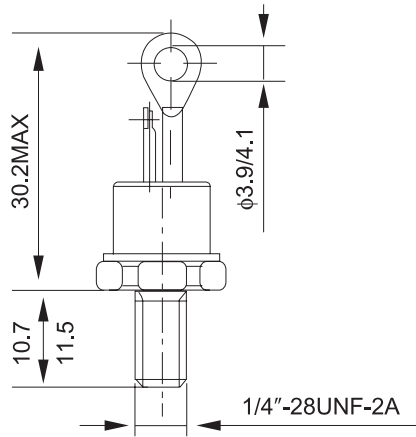

*FOR METRIC DEVICE: M6×1

Case Style TO-48

YUEQING LIUJING RECTIFIER CO., LTD

Sale Department: Liujing Building, Yueqing City,
Zhejiang Province

Add: Wanao Industrial Zone, Yueqing city,
Zhejiang Province

Tel: 0086-577-62519692 0089-577-62519693

Fax: 0086-577-62518692

International Export: 0086-577-62571902

Technical Support: 0086-15868768965

After Service: 400-6606-086

<http://www.china-liujing.com>

<http://www.liujingdianqi.cn>

<http://www.cnrectifier.com>

<http://www.cnthyristor.com.cn>

MSN: thristors@hotmail.com

打造最具竞争力的电力半导体产品

To be the most competitive Power Semiconductor
Devices manufactory.

LIUJING reserves the right to change limits, test conditions and dimensions.

윤정은 이 칼타로그 중에 데이트, 테스트 조건, 외형사이즈에 대한 최종 해석권을 가지고 있습니다.