

### FEATURES

- 1). Reverse voltages up to 1800V
- 2). Hermetic metal case with glass insulator
- 3). Threaded stud ISO M12 (also 1/2-20UNF, 3/8-24UNF and M12 × 1.5)
- 4). SKR: cathode to stud

### MAJOR RATINGS AND CHARACTERISTICS

$V_{RSM}$	$V_{RRM}$	$I_{FRMS}=260A$ (maximum value for continuous operation) $I_{FAV}=130A$ (sin. 180° ; $T_C=125^{\circ}C$ )
V	V	
400	400	SKR 130/04
800	800	SKR 130/08
1200	1200	SKR 130/12
1400	1400	SKR 130/14
1600	1600	SKR 130/16
1800	1800	SKR 130/18

### TYPICAL APPLICATIONS

- 1). All-purpose mean power rectifier diodes
- 2). Cooling via heatsinks
- 3). Non-controllable and half-controllable rectifiers
- 4). Free-wheeling diodes
- 5). Recommended snubber network:  
 $RC: 0.25 \mu F, 50 \Omega (P_R=2W),$   
 $R_p=50K \Omega (P_R=20W)$



### ELECTRICAL SPECIFICATIONS

Symbol	Conditions	Values	V
$I_{FAV}$	sin. 180; $T_C=100^{\circ}C$	165	A
$I_D$	K 1.1; $T_a=45^{\circ}C$ ; B2/B6	160/225	A
	K 1.1F; $T_a=35^{\circ}C$ ; B2/B6	290/405	A
$I_{FSM}$	$T_{vj}=25^{\circ}C$ ; 10ms	2500	A
	$T_{vj}=180^{\circ}C$ ; 10ms	2000	A
$I^2t$	$T_{vj}=25^{\circ}C$ ; 8,3 ... 10ms	31000	A <sub>2</sub> S
	$T_{vj}=180^{\circ}C$ ; 8,3 ... 10ms	20000	A <sub>2</sub> S
$V_F$	$T_{vj}=25^{\circ}C$ ; $I_F=500A$	max. 1.5	V
$V_{(TO)}$	$T_{vj}=180^{\circ}C$	max. 0.85	V
$r_T$	$T_{vj}=180^{\circ}C$	max. 1.3	mΩ
$I_{RD}$	$T_{vj}=180^{\circ}C$ ; $V_{RD}=V_{RRM}$	max. 22	mA
$Q_{rr}$	$T_{vj}=160^{\circ}C$ ; $-di_F/dt=10A \mu s$	120	μC
$R_{th(j-c)}$		0.35	K/W
$R_{th(c-s)}$		0.08	K/W
$T_{vj}$		-40 ... +180	°C
$T_{stg}$		-55 ... +180	°C

Symbol	Conditions	Values	V
$V_{isol}$		-	V~
$M_s$	to heatsink	10	Nm
a		5*9.81	m/s <sup>2</sup>
m	approx.	100	g
Case		E14	

**PERFORMANCE CURVES FIGURE**

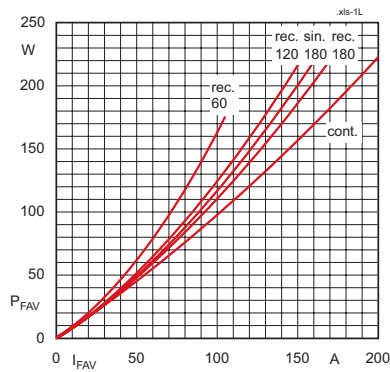


Fig. 1L Power dissipation vs. forward current

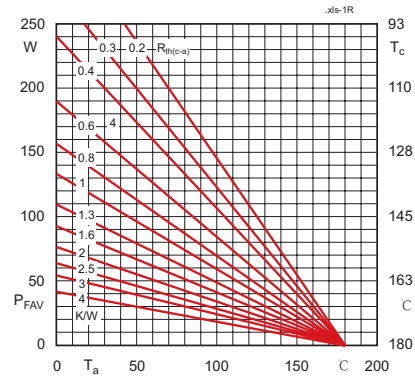


Fig. 1R Power dissipation vs. ambient temperature

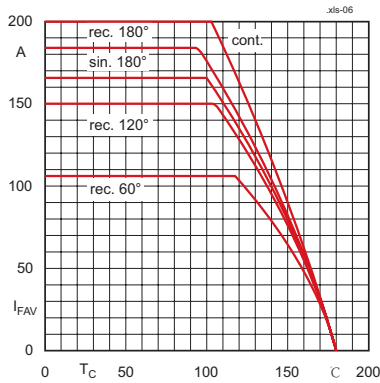


Fig. 2 Forward current vs. case temperature

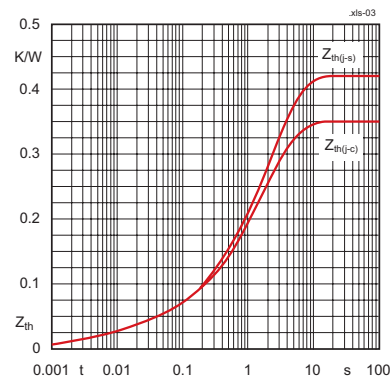


Fig. 4 Transient thermal impedance vs. time

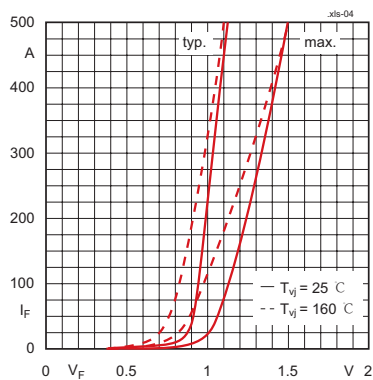


Fig. 5 Forward characteristics


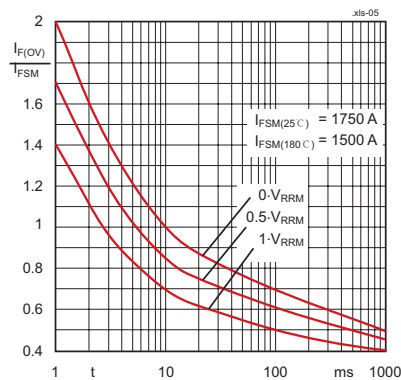


Fig. 6 Surge overload current vs. time

**OUTLINE**

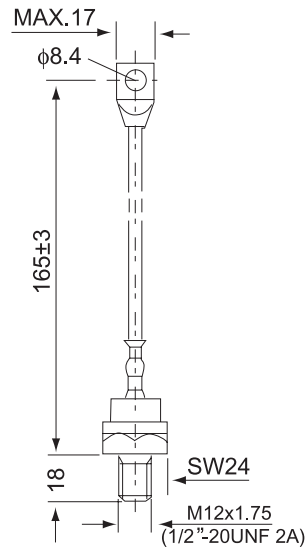

**SKD8**

**YUEQING LIUJING RECTIFIER CO., LTD**

Sale Department: LiuJing Building, Yueqing City,  
Zhejiang Province

Add: Wanao Industrial Zone, Yueqing city,  
Zhejiang Province

Tel: 0086-577-62519692    0089-577-62519693

Fax: 0086-577-62518692

International Export: 0086-577-62571902

Technical Support: 0086-15868768965

After Service: 400-6606-086

<http://www.china-liujing.com>

<http://www.liujingdianqi.cn>

<http://www.cnrectifier.com>

<http://www.cnthyristor.com.cn>

MSN: [thristors@hotmail.com](mailto:thristors@hotmail.com)

**打造最具竞争力的电力半导体产品**

To be the most competitive Power Semiconductor  
Devices manufactory.

LIUJING reserves the right to change limits, test conditions and dimensions.

윤정은 이 칼타로그 중에 데이트, 테스트 조건, 외형사이즈에 대한 최종 해석권을 가지고 있습니다.