


特点

- 1). 非绝缘，底板为公共电极
- 2). 全压接结构，优良的温度特性和功率循环能力
- 3). 低正向压降



典型应用

- | | | |
|------------|-------------------|------------------------|
| 1). 电焊机电源 | $I_{T(AV)}$ | 160A |
| 2). 各种DC电源 | V_{DRM}/V_{RRM} | 800~1800V |
| 3). 变频器 | I_{TSM} | $5.1 A \times 10^3$ |
| | I^2t | $133 A^2S \times 10^3$ |

主要参数

符号	参数	测试条件	结温	参数值			单位
			$T_j(^\circ C)$	最小	典型	最大	
$I_{T(AV)}$	通态平均电流	180° 正弦半波, 50Hz 单面散热, $T_c=90^\circ C$	125			160	A
$I_{T(RMS)}$	方均根电流		125			236	A
V_{DRM} V_{RRM}	断态重复峰值电压 反向重复峰值电压	$V_{DRM} \& V_{RRM} \text{ tp}=10\text{ms}$ $V_{DSM} \& V_{RSM} = V_{DRM} \& V_{RRM} + 200V$	125	800		1800	V
I_{DRM} I_{RRM}	断态重复峰值电流 反向重复峰值电流	at V_{DRM} at V_{RRM}	125			12	mA
I_{TSM}	通态不重复浪涌电流	10ms 正弦半波	125			5.10	KA
I^2t	浪涌电流平方时间积	$V_R=60\% V_{RRM}$				133	$A^2s \times 10^3$
V_{TO}	门槛电压		125			0.80	V
r_T	斜率电阻		125			1.74	mΩ
V_{TM}	通态峰值电压	$I_{TM}=450A$	25			1.67	V
dv/dt	断态电压临界上升率	$V_{DM}=67\% V_{DRM}$	125			800	V/μs
di/dt	通态电流临界上升率	门极触发电流1.5A, 上升时间 $tr \leq 1 \mu s$	125			100	A/μs
I_{GT}	门极触发电流			30		100	mA
V_{GT}	门极触发电压	$V_A=12V, I_A=1A$	25	0.8		2.5	V
I_H	维持电流			20		150	mA
V_{GD}	门极不触发电压	At $67\% V_{DRM}$	125	0.2			V
$R_{th(j-c)}$	热阻抗(结至壳)	单面散热				0.160	$^\circ C / W$
$R_{th(c-h)}$	热阻抗(壳至散)	单面散热				0.1	$^\circ C / W$
F_m	安装扭矩(M6)				6		N·m
	安装扭矩(M6)				6		N·m
T_{slg}	存储温度			-40		125	$^\circ C$
W_t	质量	外形为101B、102B			380		g
Size	包装盒尺寸	210 × 113 × 42 (6只装)					mm

性能曲线图

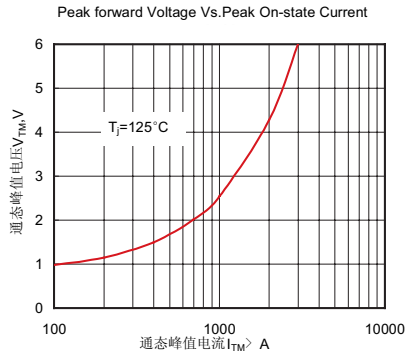


Fig.1

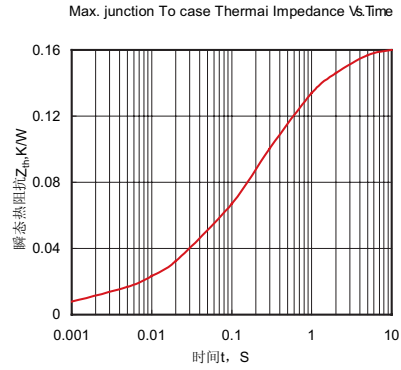


Fig.2 瞬态热阻抗曲线

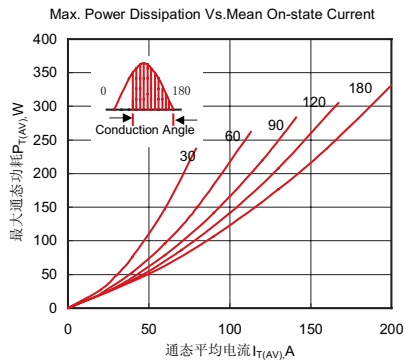


Fig.3 最大通态功耗与通态平均电流的关系曲线

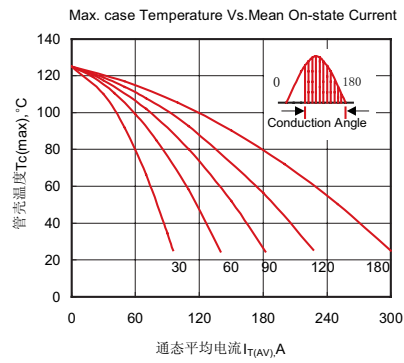


Fig.4 管壳温度与通态平均电流的关系曲线

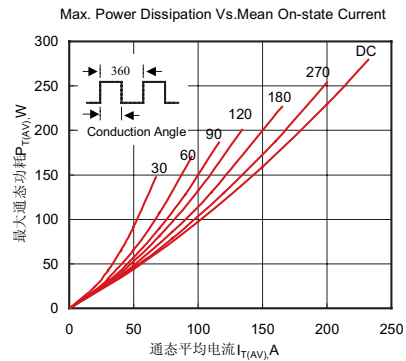


Fig.5 最大通态功耗与通态平均电流的关系曲线

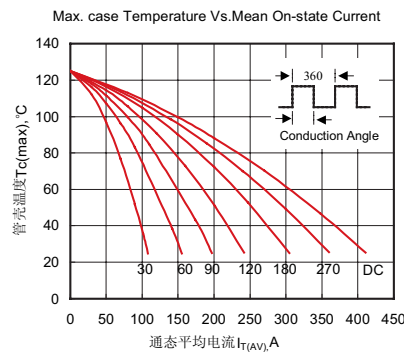


Fig.6 管壳温度与通态平均电流的关系曲线

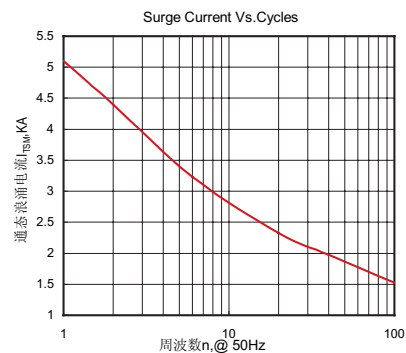


Fig.7 通态浪涌电流与周波数的关系曲线

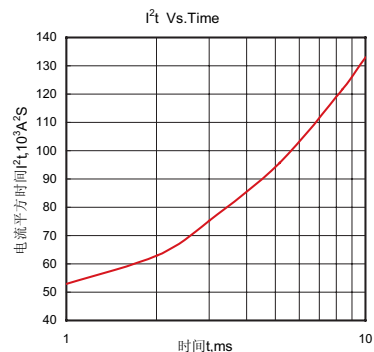


Fig.8 I²t特性曲线

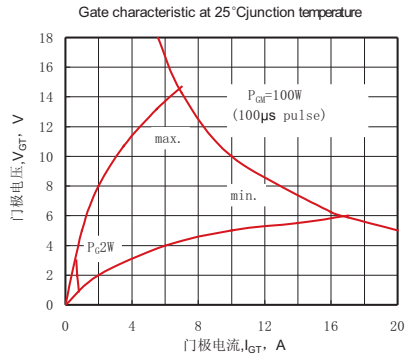


Fig.9 门极功率曲线


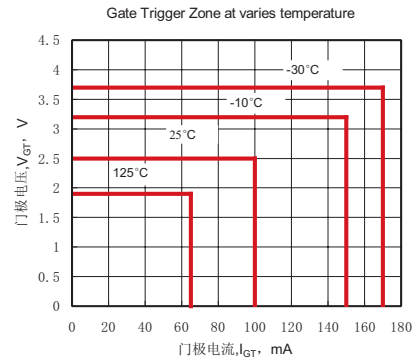


Fig.10 门极触发特性曲线

外形尺寸图

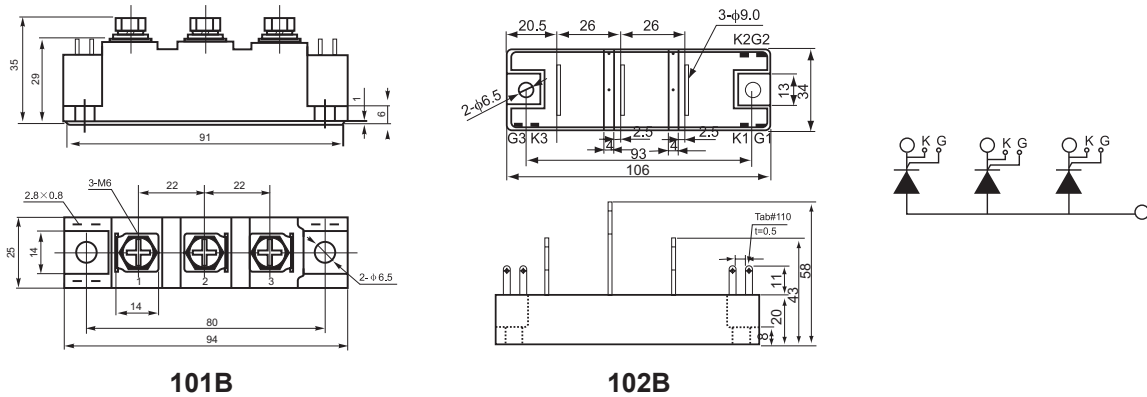

YUEQING LIUJING RECTIFIER CO., LTD
 Sale Department: Liujing Building, Yueqing City,
 Zhejiang Province
 Add: Wanao Industrial Zone, Yueqing city,
 Zhejiang Province
 Tel: 0086-577-62519692 0089-577-62519693
 Fax: 0086-577-62518692
 International Export: 0086-577-62571902
 Technical Support: 0086-15868768965
 After Service: 400-6606-086
<http://www.china-liujing.com>
<http://www.liujingdianqi.cn>
<http://www.cnrectifier.com>
<http://www.cnthyristor.com.cn>
 MSN: thristors@hotmail.com

打造最具竞争力的电力半导体产品
 To be the most competitive Power Semiconductor
 Devices manufactory.

LIUJING reserves the right to change limits, test conditions and dimensions.
 윤정은 이 칼타로그 중에 데이트, 테스트 조건, 외형사이즈에 대한 최종 해석권을 가지고 있습니다.