


FEATURES

- 1). Hermetic metal case with glass insulator
- 2). Threaded stud ISO M8 or UNF 1/4-28
- 3). International standard case

MAJOR RATINGS AND CHARACTERISTICS

V_{RSM}	V_{RRM} V_{DRM}	$(\frac{dv}{dt})_{cr}$	$I_{TRMS}=63A$ (maximum value for continuous operation)
V	V	V/ μ s	$I_{TAV}=40A$ (sin. 180° ; $T_{case}=80^{\circ}C$)
500	400	500	SKT 40/04D
700	600	500	SKT 40/06D
900	800	500	SKT 40/08D
1300	1200	1000	SKT 40/12E
1500	1400	1000	SKT 40/14E
1700	1600	1000	SKT 40/16E
1900	1800	1000	SKT 40/18E※

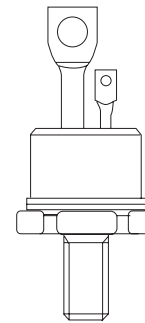

TYPICAL APPLICATIONS

- 1). DC motor control (e.g. for machine tools)
- 2). Controlled rectifiers (e.g. for battery charging)
- 3). AC controllers (e.g. for temperature control)





※ Available in limited quantities

ELECTRICAL SPECIFICATIONS

Symbol	Conditions	Values	V
I_{TAV}	sin. 180; $T_c=85^{\circ}C$	38	A
I_{TSM}	$T_{vj}=25^{\circ}C$; 10ms	700	A
	$T_{vj}=130^{\circ}C$; 10ms	600	A
I^2t	$T_{vj}=25^{\circ}C$; 8,35 ... 10ms	2500	A_2S
	$T_{vj}=130^{\circ}C$; 8,35 ... 10ms	1800	A_2S
t_{gd}	$T_{vj}=25^{\circ}C$; $I_G=1A$; $di_G/dt=1A/\mu s$	typ.1	μs
t_{gr}	$V_D=0.67 * V_{DRM}$	typ.1.5	μs
$(di/dt)_{cr}$	$f=50...60Hz$	50	$A/\mu s$
I_H	$T_{vj}=25^{\circ}C$	typ. 100; max. 200	mA
I_L	$T_{vj}=25^{\circ}C$; $R_G=33\Omega$	typ. 250; max. 400	mA
t_q	$T_{vj}=130^{\circ}C$; typ.	100	μs
V_T	$T_{vj}=25^{\circ}C$; $I_T=120A$; max.	1.95	V
$V_{T(TO)}$	$T_{vj}=130^{\circ}C$	1.0	V
r_T	$T_{vj}=130^{\circ}C$	9	$m\Omega$
I_{DD} ; I_{RD}	$T_{vj}=130^{\circ}C$; $V_{DD}=V_{DRM}$; $V_{RD}=V_{RRM}$	8	mA

Symbol	Conditions	Values	V
V_{GT}	$T_{vj}=25^{\circ}C$;	3	V
I_{GT}	$T_{vj}=25^{\circ}C$;	150	mA
V_{GD}	$T_{vj}=130^{\circ}C$	0.25	V
I_{GD}	$T_{vj}=130^{\circ}C$	5	mA
R_{thjc}	cont.	0.60	$^{\circ}C/W$
	sin.180	0.66	$^{\circ}C/W$
	rec.120	0.70	$^{\circ}C/W$
R_{thch}		0.20	$^{\circ}C/W$
T_{vj}		-40...+130	$^{\circ}C$
T_{stg}		-55...+150	$^{\circ}C$
M	SI units	4(UNF: 2.5)	Nm
	US units	35(UNF: 22)	lb.in.
a		5*9.81	m/s^2
w		2.2	g
Case		B3	

PERFORMANCE CURVES FIGURE

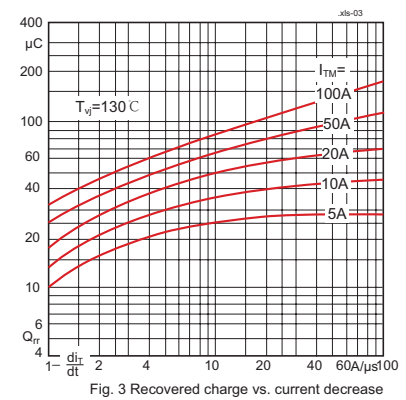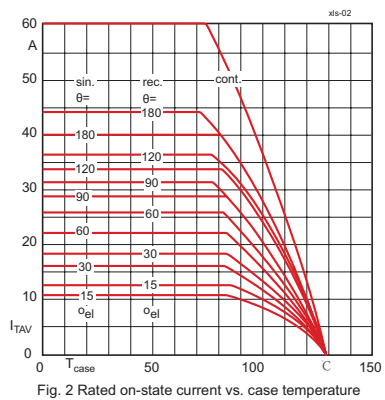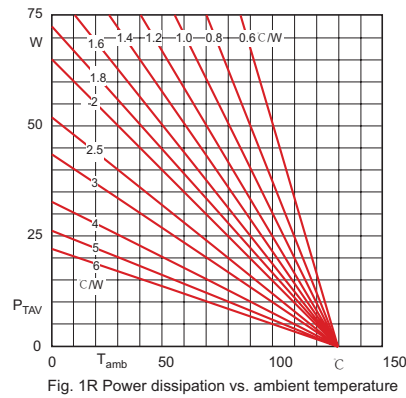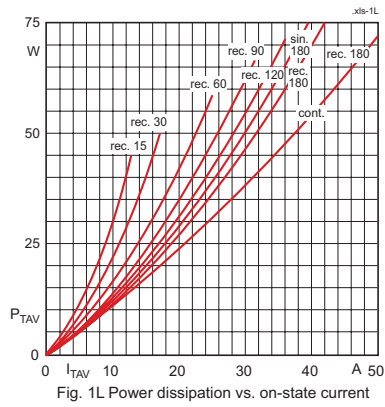

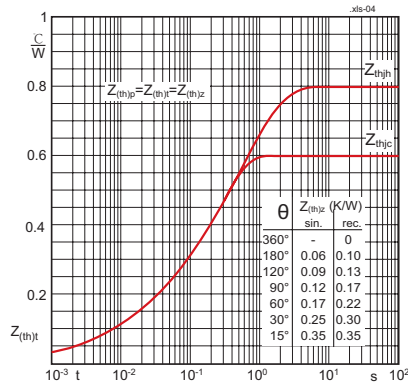


Fig. 4 Transient thermal impedance vs. time

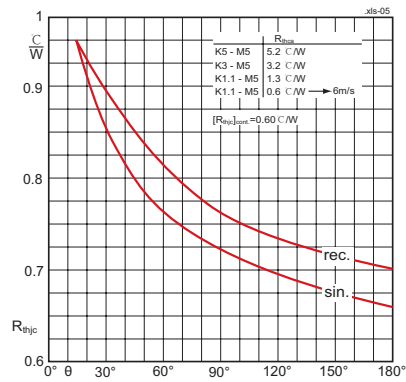


Fig. 5 Thermal resistance vs. conduction angle

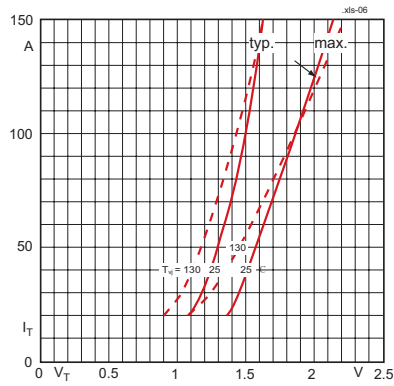


Fig. 6 On-state characteristics

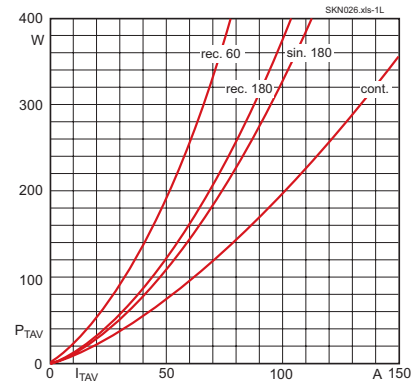


Fig. 7 Power dissipation vs. on-state current

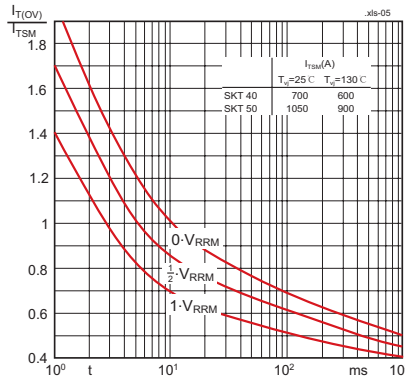


Fig. 8 Surge overload current vs. time


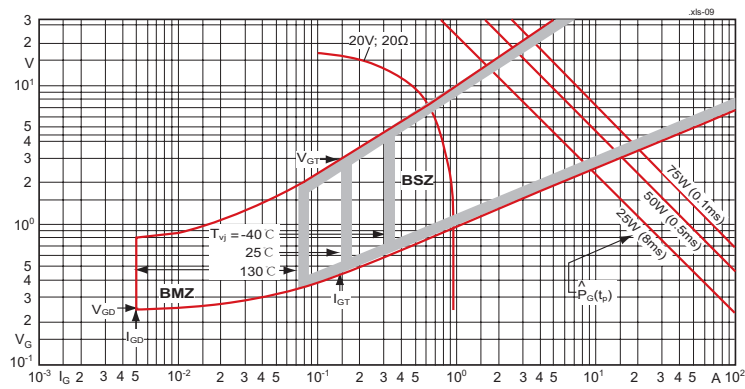


Fig. 9 Gate trigger characteristics

OUTLINE

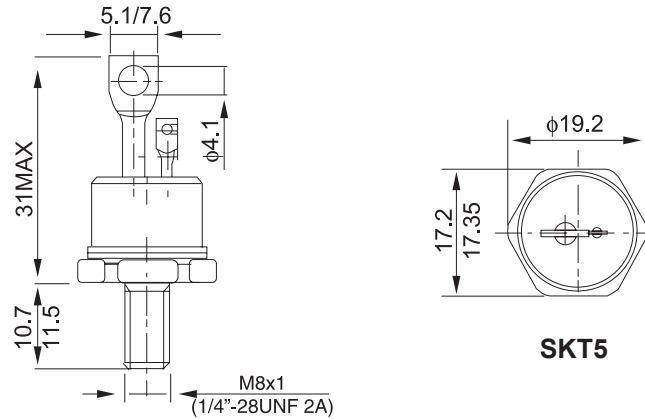

YUEQING LIUJING RECTIFIER CO., LTD

Sale Department: LiuJing Building, Yueqing City,
Zhejiang Province

Add: Wanao Industrial Zone, Yueqing city,
Zhejiang Province

Tel: 0086-577-62519692 0089-577-62519693

Fax: 0086-577-62518692

International Export: 0086-577-62571902

Technical Support: 0086-15868768965

After Service: 400-6606-086

<http://www.china-liujing.com>

<http://www.liujingdianqi.cn>

<http://www.cnrectifier.com>

<http://www.cnthyristor.com.cn>

MSN: thristors@hotmail.com

打造最具竞争力的电力半导体产品

To be the most competitive Power Semiconductor
Devices manufactory.

LIUJING reserves the right to change limits, test conditions and dimensions.

윤정은 이 칼타로그 중에 데이트, 테스트 조건, 외형사이즈에 대한 최종 해석권을 가지고 있습니다.